


Airpad Select Grease


Product Range



Features



Applications

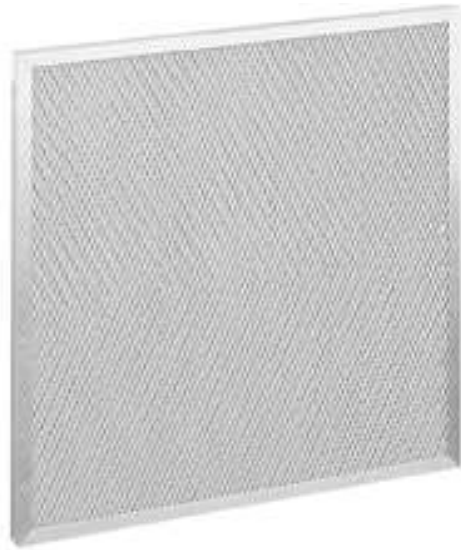

KEY FACTS

- High thermal and chemical durability
- Regenerable several times

DESIGN

Multi-layer metal filter cell, with metal gratings permanently affixed to the outer frame.

APPLICATIONS

For the capture of grease in commercial kitchens.

Airpad Select Grease

PERFORMANCE DATA

Dimensions	Frame material	Flow rate	Pressure Drop
mm		m ³ /h	Pa
250 x 500 x 12	Stainless Steel	400	15
400 x 400 x 12	Stainless Steel	540	15
400 x 500 x 12	Stainless Steel	660	15
500 x 500 x 12	Stainless Steel	830	15
500 x 625 x 12	Stainless Steel	1050	15
287 x 592 x 23	Galvanized	850	15
400 x 500 x 23	Galvanized	1000	15
500 x 500 x 23	Galvanized	1250	15
592 x 592 x 23	Galvanized	1800	15
287 x 592 x 48	Galvanized	850	25
400 x 500 x 48	Galvanized	1000	25
500 x 500 x 48	Galvanized	1250	25
592 x 592 x 48	Galvanized	1800	25
287 x 592 x 23	Aluminum	850	15
400 x 500 x 23	Aluminum	1000	15
500 x 500 x 23	Aluminum	1250	15
500 x 625 x 23	Aluminum	1570	15
592 x 592 x 23	Aluminum	1800	15
287 x 592 x 48	Aluminum	850	25
400 x 500 x 48	Aluminum	1000	25
500 x 500 x 48	Aluminum	1250	25
592 x 592 x 48	Aluminum	1800	25

SPECIFICATION

Recommended air velocity	Flow rate ± 20 %	Recommended final pressure drop	100 Pa
Heat resistance	Max. 250 °C	Moisture resistance	100 % rel. humidity
Regenerable	No	Incinerable	Yes