

Carboactiv Pocket Duosorb Eco

Product Range



Features




Applications



Filter Class

M

ePM10

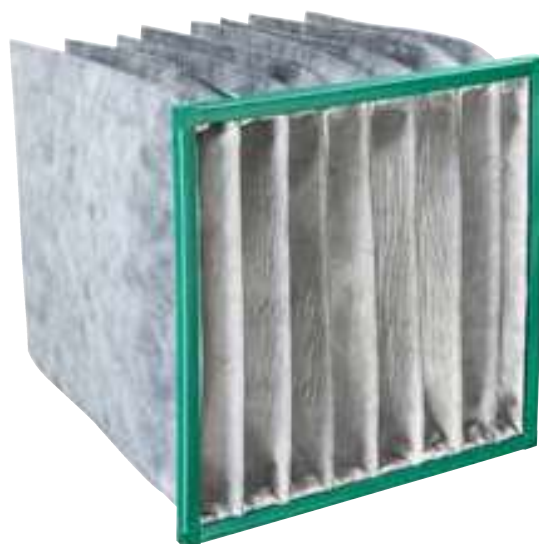

KEY FACTS

- Particle filtration and gas adsorption in one filter element
- Improvement of indoor air quality
- Ideal for eliminating odors
- Low pressure drop

DESIGN

Multi-layered synthetic and carbon media sewn together to form pockets and assembled in a robust frame.

APPLICATIONS

For use in public buildings or other places where people gather to improve indoor air quality and protect against sick building syndrome.

Carboactiv Pocket Duosorb Eco

PERFORMANCE DATA

Filter Class		Dimensions	Pockets	Flow Rate	Pressure Drop
ISO 16890	EN 779	mm		m³/h	Pa
ePM10 75%	M6	592 x 592 x 635	8	3400	70

SPECIFICATION

Heat resistance	< 30 °C (Peak 50 °C)	Rec. final pressure for efficient energy use acc. to EN 13053	Lowest value of initial pressure drop + 100 Pa, or initial pressure drop x 3
Regenerable	No	Moisture resistance	< 60 % (Max. < 90 %)
Incinerable	No		

OPTIONS

Gasket	Flat gasket, 1 or 2 sides
---------------	---------------------------